

FV
FULL-VISION



American D-22 DYNAMIC

Recommended for public address and sound recording.

The D-22 Dynamic Omni-directional is efficient for all audio-pick-up. Modern "FULL-VISION" styling for artist and audience.

Frequency response from 100-8000 c.p.s., plus or minus 5.0 db.

D-22 DYNAMIC

Code: Doall
List—\$75.00

MODEL ND STAND

Code: Short
List—\$10.00

Available with either single-conductor shielded low loss cable, or two conductor shielded rubber covered cable for low impedance, balanced line.

SPECIFICATIONS

FREQUENCY RESPONSE: From 100-8,000 c.p.s., plus or minus 5.0 db.

OUTPUT LEVEL: +86 db. at low impedance. -52 db. at high impedance. (0 db = 1 volt/dyne/cm²).

IMPEDANCE: May be easily and quickly changed to low (30-50) or high (40,000) ohms impedance by removing name plate and changing linkage bars to impedance desired.

DIAPHRAGM: Micro-metal alloy diaphragm, unaffected by temperature changes, treated for protection against corrosion.

MAGNETIC CIRCUIT: Alnico V and Armco magnetic iron.

CASE: Precision machined duraluminum.

FINISH: Permanent gold and black, anodized.

CONNECTOR: Cannon XL-3-11 "latch-lock" connector.

CABLE: 25 feet of single-conductor shielded rubber covered cable.


STAND COUPLINGS: 3/4"-27 thread on combination swivel and "slide-lock"

SLIDE-LOCK: For quickly and easily removing microphone from stand.

WEIGHT: Complete microphone (including swivel and "slide-lock") seven ounces.

DIMENSIONS: Overall height (including swivel and "slide-lock") 8 1/4 inches. Diameter 1 inch.

PACKAGING: Black leatherette-covered storage box, velvet lined, rubber cushioned interior for full protection of microphone when not in use.

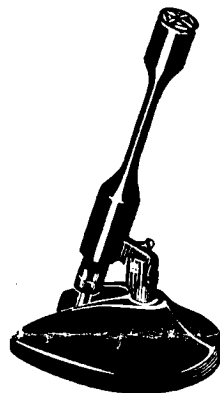

Quickly and easily detached for use as a hand microphone or suspension. Antihalation finished D-22 microphone available at \$5.00 list additional. Shown mounted on the American model ND desk stand.




Diagram illustrates linkage bars. To change impedance, back off screws (do not remove) and slide linkage bar to connect impedance desired then tighten screws.

American MICROPHONE CO., 370 SOUTH FAIR OAKS AVE., PASADENA 2, CALIFORNIA