

Announce Microphone, Type KN-1A

Uses


The KN-1A is an excellent microphone of the dynamic pressure type, ideally suited for announcing and "talkback" purposes in broadcasting.

Description

This microphone is of an entirely new design with modernistic lines. The shank fitting is a standard $\frac{5}{8}$ "-27 thread for public address use. $\frac{5}{8}$ "-27 to $\frac{1}{2}$ " adaptor, MI-12053, is used to attach it to the broadcast standard $\frac{1}{2}$ " pipe thread stand fitting. The microphone is mounted on the adjustable swivel and may be moved through an arc of 80° in the vertical plane. The shank accommodates the cable with the new type "XL" female plug which is inserted in the microphone male plug. A hinge cover protecting the connectors is snapped closed.

Specifications

Directional Characteristic _____ Semi-directional
Effective Output Level _____ -57 dbm*

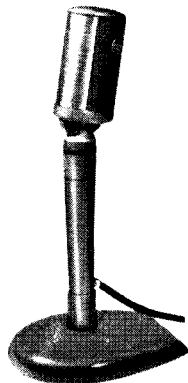

Hum Pick-up Level _____ 109 dbm**
Frequency Response _____ 100-8,000 cycles
Output Impedance _____ 250 ohms
Finish _____ Two tone umber gray

Dimensions:

Length _____ $9\frac{3}{4}$ "
Width _____ $1\frac{1}{2}$ "
Depth _____ 2"
Weight Less Cable (unpacked) _____ $1\frac{1}{4}$ lbs.
Mounting _____ $\frac{5}{8}$ " 27 fixture thread

Stock Identification:

With 15' Cable _____ MI-12081-B
With 30' Cable _____ MI-12081-C

Accessories

Cable Only (2 conductor) _____ MI-42
Desk Stand (gray metalustre) _____ MI-12066
Desk Stand (black) _____ MI-12066-A

* Referred to one milliwatt and a sound pressure
10 dynes/cm².

** Level referred to a hum field of 1×10^{-3} gauss.