


- **Economical General Purpose Units**
- **Compact and Lightweight**
- **Versatile—May be Hand-Held or Swivel Mounted**
- **High and Low Impedance Types**

## All Purpose Dynamic Microphone,

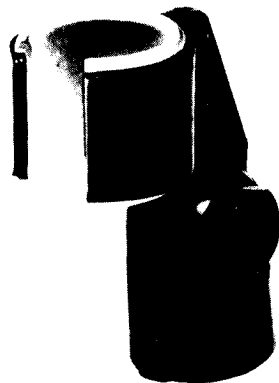

This compact, attractive-looking unit is an ideal general purpose dynamic microphone for public address and paging applications.

It is omnidirectional, and available as a low impedance (SK-30) or high impedance (SK-31) unit. This is a rugged, lightweight microphone with good response to voice and music. In addition to being hand held, it may be used as either a lavalier microphone, or can be swivel-mounted on a desk or floor stand.

Directional Characteristics .....	Omnidirectional
Frequency Response .....	60 to 12,000 cps
Output Impedance:	
SK-30 .....	Matches 50-250 ohm input
SK-31 .....	30,000 ohms
Effective Output Level (1000 cps)	
(10 dynes/cm <sup>2</sup> ) .....	56 dbm
EIA—G <sub>M</sub> .....	150 db
Cable (Attached):	
SK-30 .....	20 ft. two conductor shielded, no plug
SK-31 .....	20 ft. single conductor shielded, no plug
Mounting .....	5/8—27 thread
Dimensions (overall) .....	1 1/2" diameter by 4 1/2" long
Weight .....	5 oz.
Finish .....	Midnight blue

### Connection Information

	Signal	Ground
SK-30 .....	Black and White	Shield
SK-31 .....	White	Shield

### Ordering Information

Type SK-30 General Purpose Dynamic Microphone (Low Impedance) .....	MI-11030-1
Type SK-31 General Purpose Dynamic Microphone (High Impedance) .....	MI-11031-1

### Accessory

5/8—27 Swivel Adaptor (Fits Conventional Floor and Desk Stands) .....	MI-11032
---	----------

3PB



RADIO CORPORATION OF AMERICA

PRINTED  
IN  
U.S.A.